



中国认可  
国际互认  
检测  
TESTING  
CNAS L4743

**Test Report**

No. AJFS1908008429FF

Date: SEP.06, 2019

Page 1 of 7

**DONGGUAN GUANGMAI ELECTRONIC TECHNOLOGY CO., LTD**

16B, INTERNATIONAL FINANCE IT RESEARCH AND DEVELOPMENT CENTER, NO.5 KEJI TEN ROAD,  
SONGSHAN LAKE HIGH-TECH INDUSTRIAL DEVELOPMENT ZONE, DONGGUAN, CHINA

The following sample(s) was / were submitted and identified on behalf of the client. SGS is not responsible for the authenticity, integrity and results of the data and information and / or the validity of the conclusion. results apply to the sample as received.

**Sample Name:** CELLULAR SILICONE FOAM

**SGS Ref No.:** GZAT1908014135NM

**Color:** BLACK

**Thickness:** 3.18mm

**Parts No.:** GK-260

**Addition Information:** Product Thickness Range: 0.8-20mm

**Test Requested:**

EN 45545-2:2013+A1:2015 Railway applications—Fire protection on railway vehicles Part 2: Requirements for fire behaviour of materials and components, and testing according to Table 5 — Material requirement sets (R22)

**Test Results:** -- See attached sheet --

**Test Period:**

Sample Receiving Date : AUG.26, 2019

Test Performing Date : AUG.26, 2019 TO SEP.03, 2019

Signed for and on behalf of  
SGS-CSTC Co., Ltd. Anji Branch

Allen Zou  
Lab Manager



AJFS1908008429FF



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

SGS-CSTC Inspection & Testing Services Co., Ltd.  
Anji Branch Fire Technology Service

No. 301, Sunlight Road, 2 Block, Sunlight Industry Zone, Anji County, Zhejiang Province, China 313300 t (86-572) 5018825 f (86-572) 5018829 www.sgs.com.cn  
中国·浙江·安吉县阳光工业园二区阳光大道301号 邮编: 313300 t (86-572) 5018825 f (86-572) 5018829 e [sgs.china@sgs.com](mailto:sgs.china@sgs.com)

**I. Description of Test specimens**

Sample Description	Cellular silicone foam
Color	Black
Exposed (test) surface	Any surface
Size of specimens	T01 EN ISO 4589-2: 150mm×10mm×3.2mm
	T10.03 EN ISO 5659-2: 75mm×75mm×3.2mm
	T12 NF X70-100-1&-2: 1, <u>1.0003g</u> 2, <u>1.0000g</u> 3, <u>1.0002g</u>

**II. Summary of test results**

Requirement set (used for)	Test method reference	Parameter Unit	Test results *
R22 (IN16; EL2; EL6A; EL7A; M2)	T01 EN ISO 4589-2: OI	Oxygen content %	36.4
	T10.03 EN ISO 5659-2: 25 kW/m <sup>2</sup>	Ds max. dimensionless	22.6
	T12 NF X 70-100-1 and -2 600°C	CIT <sub>NLP</sub> dimensionless	0.04

\* For the test details, please see the appendix of this test report.

**III. Conclusion**

According to the test results, the submitted sample **meets** the requirements of R22 (detailed in Table 5 of EN 45545-2:2013+A1:2015) for **HL3**Hazard Level Classification.

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
**Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone:(86-755) 8307 1443, or email: CN.Doccheck@sgs.com**

**Test Criteria for EN 45545-2:2013+A1:2015 Table 5 Material requirement sets (R22)**

Requirement set (used for)	Test method reference	Parameter Unit	Requirement Definition	HL1	HL2	HL3
R22 (IN16; EL2; EL6A; EL7A; M2)	T01 EN ISO 4589-2: OI	Oxygen content %	Minimum	28	28	32
	T10.03 EN ISO 5659-2: 25 kW/m <sup>2</sup>	Ds max. dimensionless	Maximum	600	300	150
	T12 NF X 70-100-1 and -2 600°C	CIT <sub>NLP</sub> dimensionless	Maximum	1.2	0.9	0.75

**Statements:**

This declaration of conformity is only based on the result of this laboratory activity, the impact of the uncertainty of the results was not included.

The test results relate to the behaviour of the test specimens of a product under the particular conditions of the test; they are not intended to be the sole criterion for assessing the potential fire hazard of the product in use.

The test results relate only to the specimens of the product in the form in which were tested.

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

**Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com**

**APPENDIX 1: T01 EN ISO 4589-2:2017 Determination of burning behaviour by oxygen Index Part 2: Ambient temperature test**

**1. Conditioning**

T: 23±2°C, R.H: 50±5%, at least 88 h.

**2. Test results**

- a) Select initial oxygen concentration (in accordance with 8.2.3): 30%
- b) Determining the Preliminary Oxygen Concentration (Till pair of oxygen concentrations which gives opposite response differs by ≤1%, in accordance with 8.6)

Oxygen concentration, % (V/V)	30	35	36	37	-	-	
Length burnt, mm	<50	<50	<50	>50	-	-	
Response, ("X" or "O")	O	O	O	X	-	-	

Oxygen concentration of the "O" response for the pair = 36.0% (this is the concentration to be used again for the first measurement in section below)

- c) Determination of the oxygen index (in accordance with 8.7)

Step size to be used for successive changes d in oxygen concentration = 0.2% [Initially to be 0.2% (V/V), unless otherwise instructed]

Parameter	N <sub>T</sub> series measurements										
	NL series measurements (8.7.1 and 8.7.2)						(According to the 8.7.3) cf				
Oxygen concentration, % (V/V)	36.0	36.2	36.4	--	--	--	36.4	36.2	36.4	36.6	36.4
Length burnt, mm	<50	<50	>50	--	--	--	>50	<50	<50	>50	>50
Response ("X" or "O")	O	O	X	→	→	→	X	O	O	X	X
	Column (2, 3, 4 or 5): 3						Row (1 to 16): 4				
	k value from EN ISO 4589-2 table 4: -0.14										
	Hence k= -0.14										

$$\begin{aligned}
 OI &= Cf + kd = 36.4 + (-0.14 \times 0.2) \\
 &= \underline{36.4\%} \text{ (to one decimal place)} \\
 &= \underline{36.37\%} \text{ (to two decimal places)}
 \end{aligned}$$

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com

**APPENDIX 2: T10.03 EN ISO 5659-2:2017 Plastics—Smoke generation — Part 2: Determination of optical density by a single- chamber test. Heat flux 25kW/m<sup>2</sup> with pilot flame, test duration is 10min.**

**1. Conditioning**

T: 23±2 °C, R.H: 50±5%, until the test sample was conditioned to constant mass.

**2. Test Results**

Parameters	1	2	3	Avg
Mass(g)	3.7	3.8	3.5	3.7
D <sub>s</sub> (1.5)	10.4	8.7	10.7	9.9
D <sub>s</sub> (4)	16.0	20.1	19.4	18.5
D <sub>s</sub> (10)	17.8	19.4	17.2	18.1
VOF <sub>4</sub> min	41.3	44.3	42.3	42.6
D <sub>s</sub> max	18.9	26.4	22.4	22.6
T (D <sub>s</sub> max) s	331	361	347	346.3

**NOTE:**

D<sub>s</sub> (n) is the specific optical density at n<sup>th</sup> min;

VOF<sub>4</sub> is the cumulative value of specific optical densities in the first 4 min of the test;

D<sub>s</sub> max is the maximum optical density in the test chamber.

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: [CN.Doccheck@sgs.com](mailto:CN.Doccheck@sgs.com)

**APPENDIX 3: T12 NF X70-100-1:2006 Fire tests—Analysis of gaseous effluents—Part 1: Methods for analysing gases stemming from thermal degradation & NF X70-100-2:2006 Fire tests—Analysis of gaseous effluents—Part 2: Tubular furnace thermal degradation method. Furnace Temperature: 600°C, Toxic for non-listed products.**

**1. Conditioning**

T: 23±2°C and R.H 50±5%, at least 48h and until the test sample was conditioned to constant mass.

**2. Test results**

Gas component [mg/g]	1	2	3	Avg	Reference concentration [mg/m <sup>3</sup> ]
CO	43.88	43.21	41.88	42.99	1380
CO <sub>2</sub>	511.88	525.80	494.46	510.71	72000
HF	ND	ND	ND	--	25
HCl	ND	ND	ND	--	75
HBr	ND	ND	ND	--	99
HCN	ND	ND	ND	--	55
NO, NO <sub>x</sub>	ND	ND	ND	--	38
SO <sub>2</sub>	ND	ND	ND	--	262

ND indicates Non-detected.

**Calculations of CIT<sub>NLP</sub>**

$$CIT_{NLP} = 1 \frac{g}{m^3} \sum_{i=1}^{i=8} \frac{Y_i}{C_i}$$

Y<sub>i</sub> : is the yield of i<sup>th</sup> gas in mg/g in the NF X70-100-1 tube furnace;

C<sub>i</sub> : is the reference concentration of the i<sup>th</sup> gas in mg/m<sup>3</sup>.


**CIT<sub>NLP</sub> = 0.04**

To be continued...



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <http://www.sgs.com/en/Terms-and-Conditions.aspx> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents.aspx>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.  
**Attention: To check the authenticity of testing / inspection report & certificate, please contact us at telephone: (86-755) 8307 1443, or email: CN.Doccheck@sgs.com**

Photo Appendix:

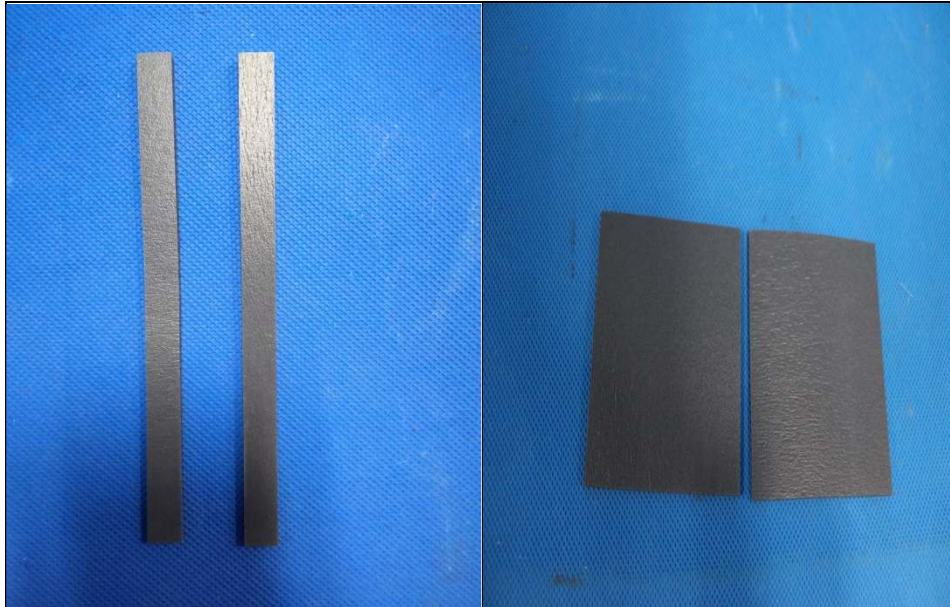

SGS authenticate the photo on original report only

\*\*\*End of Report\*\*\*

